

LSLAVSJ | LSLAESJ – DRUVA® PUR LINE REGULATOR

LINE REGULATOR | PURE LINE (STAINLESS STEEL) | 20 m³ SERIES | ABSOLUTE PRESSURE RANGE SINGLE STAGE | 6-PORT VERSION



This single-stage line pressure regulator is used in gas supply systems for pure, inert, flammable, oxidising, corrosive and / or toxic gases and their mixtures up to gas purity 6.0.




SPECIAL FEATURES:


- > Hastelloy diaphragm tightening system to atmosphere
- > Compact design
- > Excellent pressure adjustment
- > Designed and approved regarding ISO 7291
- > Relief valve in delivery pressure side available
- > Electrostatic chargeability test
 - Fulfills requirements according to DIN EN ISO 80079-36; IEC TS 60079-32-1 and German TRGS 727
 - Usable in EX- areas zones 1 and 2 for gases with explosion risk group I; IIA; IIB; IIC

TECHNICAL DATA	
Working temperature:	-20 °C to +60 °C
Inlet / outlet ports:	See technical drawing
Leakage rate seat:	<5x10 ⁻⁶ mbar l/s (Helium)
Leakage rate outside:	<1x10 ⁻⁹ mbar l/s (Helium)
Filter:	1x for inlet 1x for each outlet
Weight:	1,30 kg
Flow nominal:	3 m ³ /h
Material gas wettet parts:	
Regulator body:	Stainless Steel
Regulator diaphragm:	Hastelloy
Regulator seat:	LSLAVSJ-Version FKM LSLAESJ-Version EPDM
Relief valve seat:	LSLAVSJ-Version FKM LSLAESJ-Version EPDM
Regulator poppet:	Stainless Steel
Pressure rates line regulator:	
Max. inlet pressure	12 bar
Delivery pressure	2 bar abs / 3 bar abs
Pressure gauges rates (pressure rates):	-1 bar till 1,5 bar (2 bar abs) / -1 till 5 bar (3 bar abs)
Contact gauges available – please contact us	
Cracking pressure relief valves:	1,5 bar (2 bar abs) / 3,1 bar (3 bar abs)
Test in production:	Pressure test with Helium of each item
	Seat leakage test with Helium of each item
	Helium leak test of each regulator against atmosphere
	Test of functionality of each item
Approvals during development:	Type test in accordance with EN ISO 7291
	Additional life cycle test
	Electrostatic chargeability test <ul style="list-style-type: none"> • Fulfill requirements according DIN EN ISO 80079-36; IEC TS 60079-32-1 and German TRGS 727 • Usable in EX-areas zones 1 and 2 for gases with explosion risk group I; IIA; IIB; IIC


TECHNICAL DRAWING:

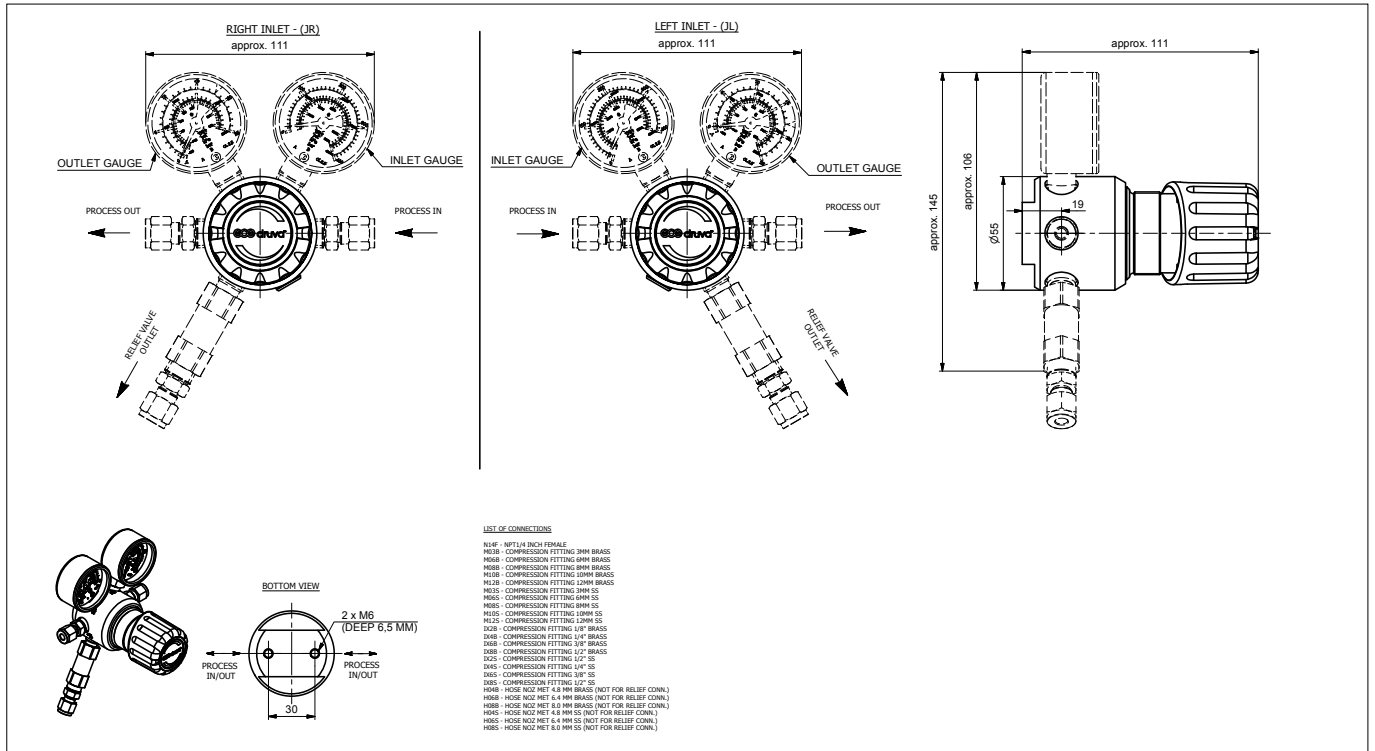

FLOW CURVES:

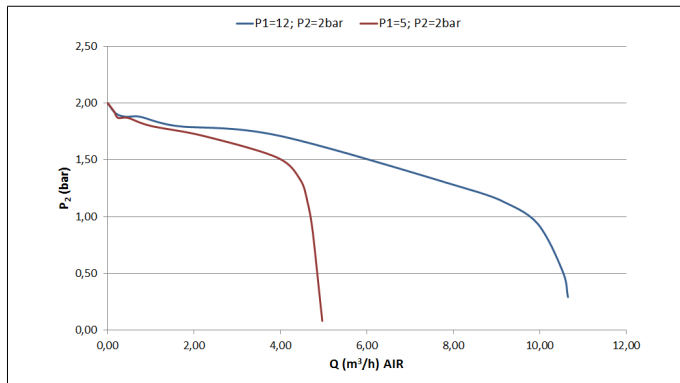

DYNAMIC EXPANSION CURVES:

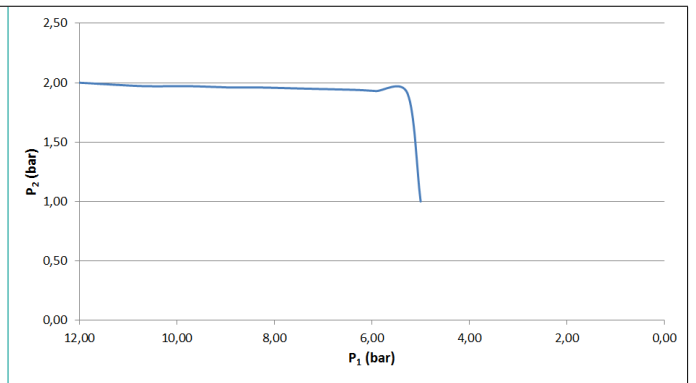

ORDER CODE:

Example Line Regulator | PUR Linie | Stainless Steel | Low Flow | Absolute Pressure | Single Stage | 6-Port Version

LSLAVSJ LSLAESJ	R	D1	AX	00	BT	N14F (1/4" NPT female)	N14F (1/4" NPT female)	00	0001
	Porting	Inlet pressure	Outlet pressure	Inlet gauge	Outlet gauge	Inlet connection	Outlet connection	Safety device	Relief valve connection
	R Inlet right	D1 12 bar	AX 2 bar (abs.)	00 Without 1/4" NPT female	00 Without 1/4" NPT female	possible connections	possible connections	00 Without 1/4" NPT female	0001 – if no safety device is chosen possible connection if safety device RV is chosen see technical drawing
	L Inlet left		BX 3 bar (abs.)	01 Without (plugged)	01 Without (plugged)			01 Without (plugged)	
				BT Bourdon Tube gauge	BT Bourdon Tube gauge	see technical drawing	see technical drawing	RV Relief valve	
				I1 Inductiv contact gauge I1					
				R5 Reed contact gauge R5					

Order code (as described above) without special characters or spaces! Complete Order Code **LSLAVSJRD1AX00BTN14FN14F000001**



Link to online product configurator