

# MSLHOXSP | MSLHEXSP – DRUVA®PUR MANIFOLD

MANIFOLD | PURE LINE (STAINLESS STEEL) | 20 m³ SERIES | HIGH PRESSURE RANGE  
SINGLE STAGE | PROCESS GAS PURGING



This manifold is used in gas supply systems for pure, inert, flammable, oxidising, corrosive and / or toxic gases and their mixtures up to gas purity 6.0.



Type MSLHOXSP00  
P0 HP Purge Valve  
0 Without Specials



Type MSLHOXSP0U  
P0 HP Purge Valve  
U Specials  
Check Valve &  
Safety Valve



Type MSLHOXSPSU  
PS HP Purge Valve &  
LP Shut-off Valve  
U Specials  
Check Valve &  
Safety Valve

### TECHNICAL SPECIFICATION:


- > Manifold for one gas cylinder or bundle
- > Regulator and Valves – Hastelloy/Elgiloy diaphragm tightening system to atmosphere
- > Compact design
- > Excellent pressure adjustment
- > Valves - designed and approved in accordance with relevant sections of ISO 10297:2015
- > Regulator - designed and approved regarding ISO 7291
- > Relief valve in delivery pressure side
- > Manifold with purge valve for process gas purging
- > Available with shut-off valve at outlet, safety valve at outlet, check valve at inlet
- > Electrostatic chargeability test  
Fulfills requirements according to ISO 80079-36, IEC TS 60079-32-1 and German TRGS 727  
Usable in EX- areas zones 1 and 2 for gases with explosion risk group I, IIA, IIB, IIC

### SPECIAL FEATURES OF MANIFOLD:

- > Splitted plates of manifold
- > Separated mounting of ground plate
- > Easy mounting of manifold to ground plate and fix with one screw only
- > Front plate cutout for in-field gauge replacement

TECHNICAL DATA – MANIFOLD	
<b>Working temperature:</b>	-20 °C to +60 °C
<b>Inlet/ outlet ports:</b>	see technical drawing
<b>Leakage rate seat:</b>	<5x10 <sup>-6</sup> mbar l/s (Helium)
<b>Leakage rate outside:</b>	<1x10 <sup>-9</sup> mbar l/s (Helium)
<b>Weight:</b>	max 5,21 kg
<b>Flow nominal:</b>	20 m³/h (N₂) acc. to ISO 7291 at 20 bar outlet pressure and 41 bar inlet pressure
<b>Pressure rates manifold:</b>	
<b>Max. inlet pressure:</b>	300 bar
<b>Delivery pressure:</b>	3/ 6/ 10/ 14/ 28/ 50/ 100/ 200 bar

TECHNICAL DATA – REGULATOR	
<b>Filter:</b>	1x for inlet 1x for each outlet
<b>Material gas wetted parts:</b>	
<b>Regulator body:</b>	Stainless Steel
<b>Regulator diaphragm:</b>	Hastelloy
<b>Regulator seat:</b>	PCTFE
<b>Regulator poppet:</b>	Stainless Steel
<b>Relief valve seat:</b>	
MSLHOXSP-Version	FKM
MSLHEXSP-Version	EPDM
<b>Pressure gauges rates (pressure rates):</b>	5 (3)/ 10 (6)/ 18 (10)/ 25 (14)/ 40 (28)/ 80 (50)/ 160 (100)/ 315 (200) bar
<b>Contact gauges available – please contact us</b>	
<b>Cracking pressure relief valves:</b>	4,6 (3)/ 9,2 (6)/ 15,4 (10)/ 21,6 (14)/ 43,1 (28)/ 65 (50)/ 154 (100)/ 308 (200) bar
	Pressure test with Helium of each item
	Seat leakage test with Helium of each item
<b>Test in production:</b>	Helium leak test of each regulator against atmosphere
	Test of functionality of each item

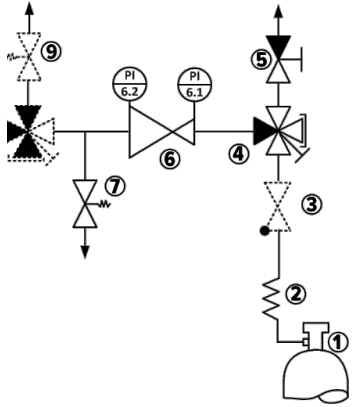

- 1 – Gas cylinder
- 2 – Coil/Hose
- 3 – Check valve
- 4 – Shut-off valve (3xin, 1xout)
- 5 – Purge outlet valve
- 6 – Pressure Regulator
- 7 – Relief valve
- 8 – Shut-off valve (1xin, 3xout)
- 9 – Safety valve

Options & specials are shown as dotted line

	Type test in accordance with ISO 7291
	Additional life cycle test
<b>Approvals during development:</b>	Electrostatic chargeability test
	<ul style="list-style-type: none"> <li>• Fulfill requirements according ISO 80079-36, IEC TS 60079-32-1 and German TRGS 727</li> <li>• Usable in EX-areas zones 1 and 2 for gases with explosion risk group I, IIA, IIB, IIC</li> </ul>

TECHNICAL DATA – VALVES	
<b>Max. working pressure:</b>	300 bar
<b>Kv-value:</b>	0,25
<b>Seat diameter:</b>	5 mm
<b>Leakage rate seat:</b>	<5x10 <sup>-6</sup> mbar l/s (Helium)
<b>Leakage rate outside:</b>	<1x10 <sup>-9</sup> mbar l/s (Helium)
<b>Filter:</b>	1x for each inlet 1x for each outlet
<b>Material gas wetted parts:</b>	
<b>Valve body:</b>	Stainless Steel
<b>Valve diaphragm:</b>	4-Port: 1x Hastelloy, 1x Elgiloy 2-Port: 2x Elgiloy
<b>Valve seat:</b>	PCTFE
<b>Valve poppet:</b>	Stainless Steel
<b>Test in production:</b>	Pressure test with Helium of each item
	Seat leakage test with Helium of each item
	Helium leak test of each valve against atmosphere
	Test of functionality of each item


	Type test in accordance with relevant sections of ISO 10297:2015
	Electrostatic chargeability test
<b>Approvals during development:</b>	<ul style="list-style-type: none"> <li>• Fulfill requirements according ISO 80079-36, IEC TS 60079-32-1 and German TRGS 727</li> <li>• Usable in EX-areas zones 1 and 2 for gases with explosion risk group I, IIA, IIB, IIC</li> </ul>

TECHNICAL DATA – PLATES	
<b>Ground plate:</b>	Stainless Steel (polished) Option to secure arrestor cable of hoses with hook on ground plate. Grounding bolt Cut outs on top and bottom allows installation
<b>Dimensions ground plate:</b> (Height x Width x Length)	194 x 30 x 230 mm
<b>Front plate:</b>	Stainless Steel (polished) Cut outs for easy replacement of gauges Free space for additional installer label (e.g. remark for next maintenance)
<b>Dimensions front plate:</b> (Height x Width x Length)	194 x 30 x 230 mm
<b>Marking on panel:</b>	Product range label QR-Code – link to online product configurator

TECHNICAL DATA – SAFETY VALVES (S)	
	Spring loaded according P.E.D. 2014/68/EU and AD2000 (A2)
<b>Opening pressure:</b>	4,5/ 9/ 15/ 21/ 42 bar
<b>Leakage rate:</b>	< 5 x 10 <sup>-6</sup> mbar l/s (valve seat) at nominal pressure of receiver
<b>Material:</b>	Housing and metal parts made of stainless steel, pressure spring made of stainless steel
<b>Seat and seal:</b>	FKM
<b>Outlet connection:</b>	NPT ½" female



FLOW CURVES:

DYNAMIC EXPANSION CURVES:

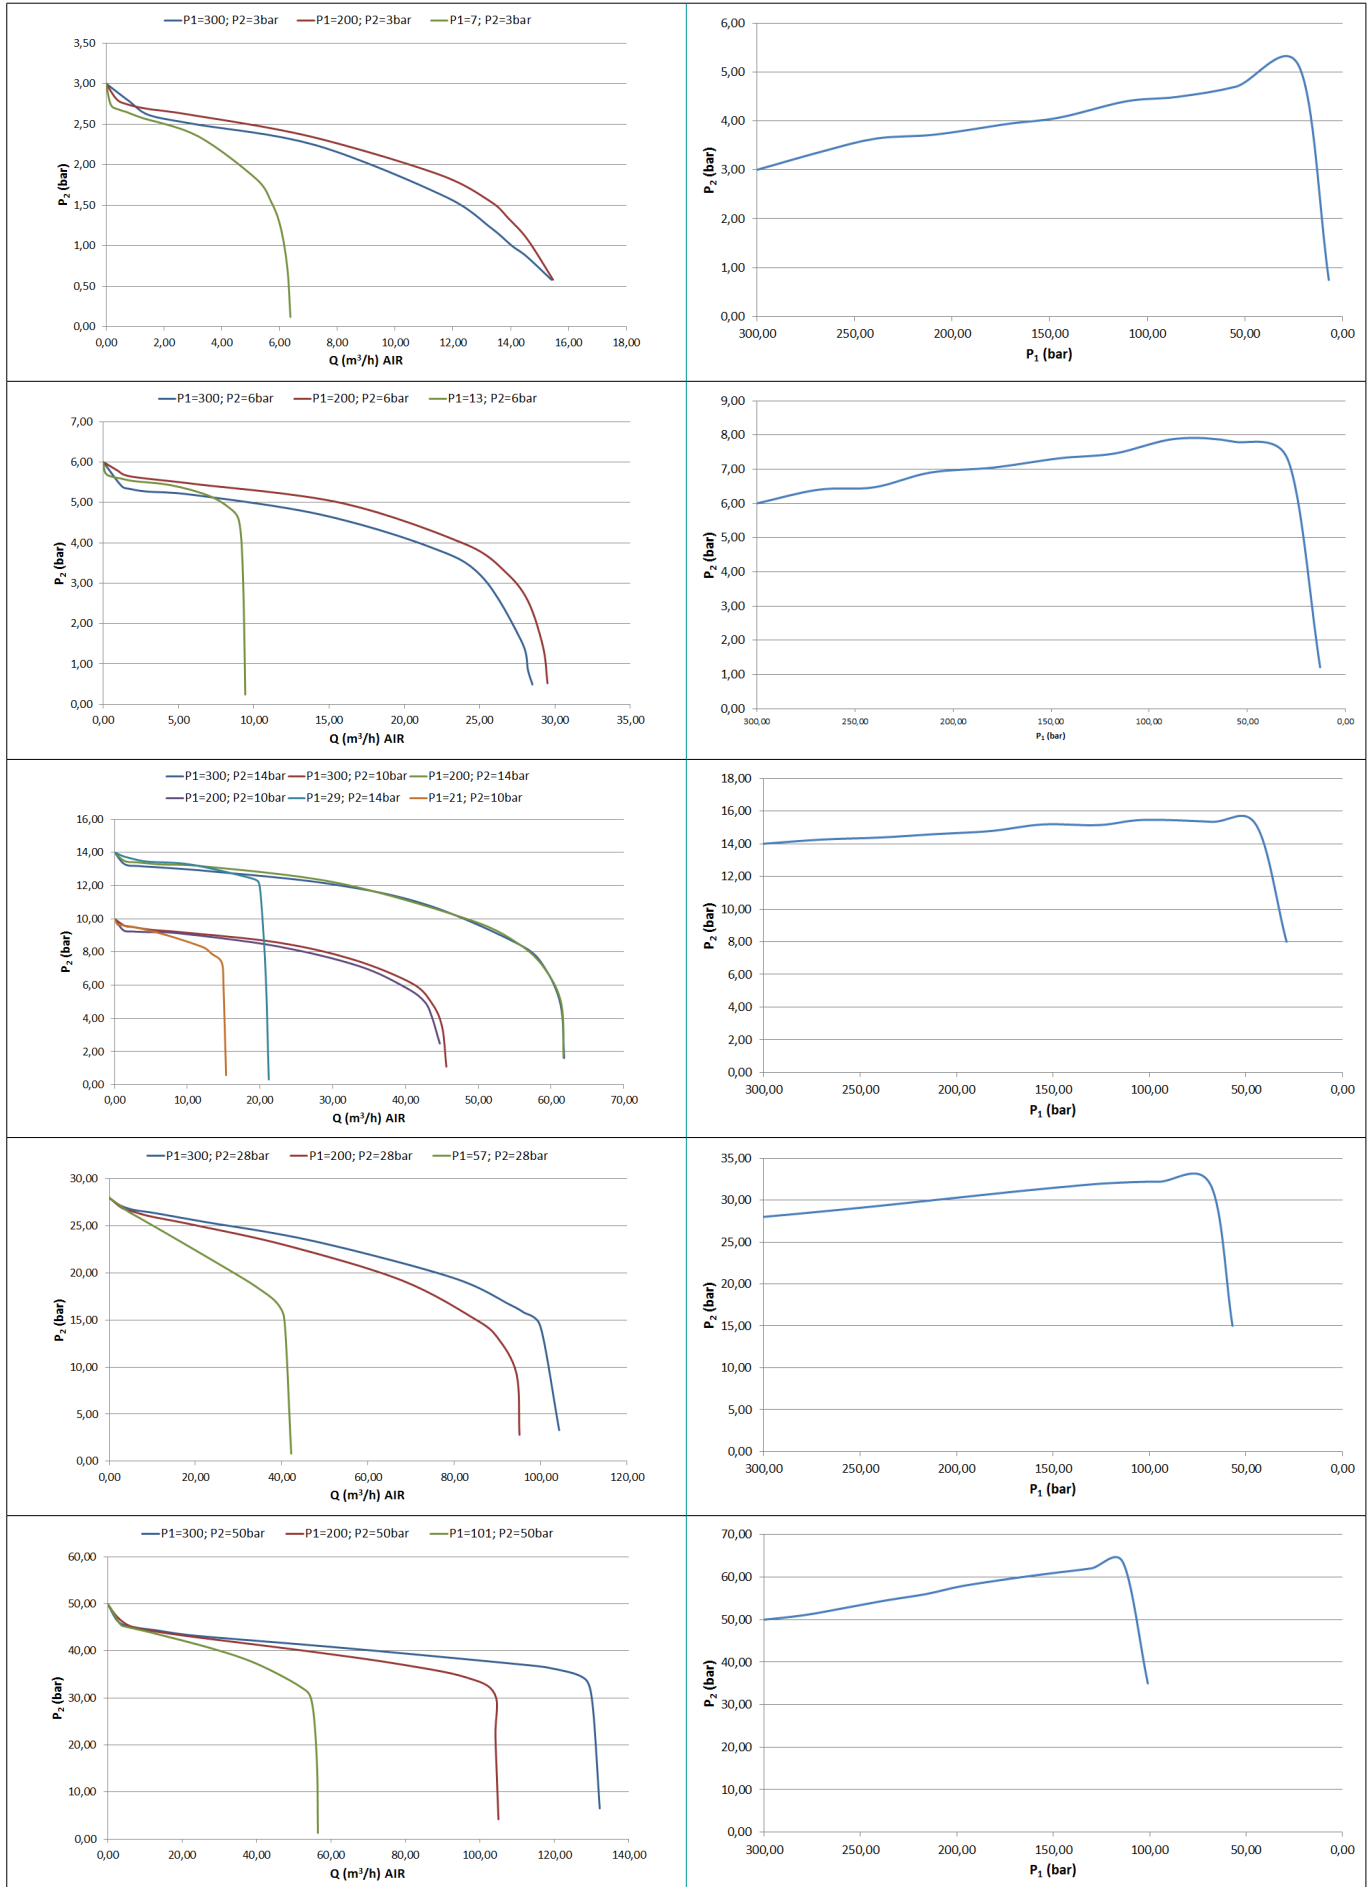


FLOW CURVES:


DYNAMIC EXPANSION CURVES:

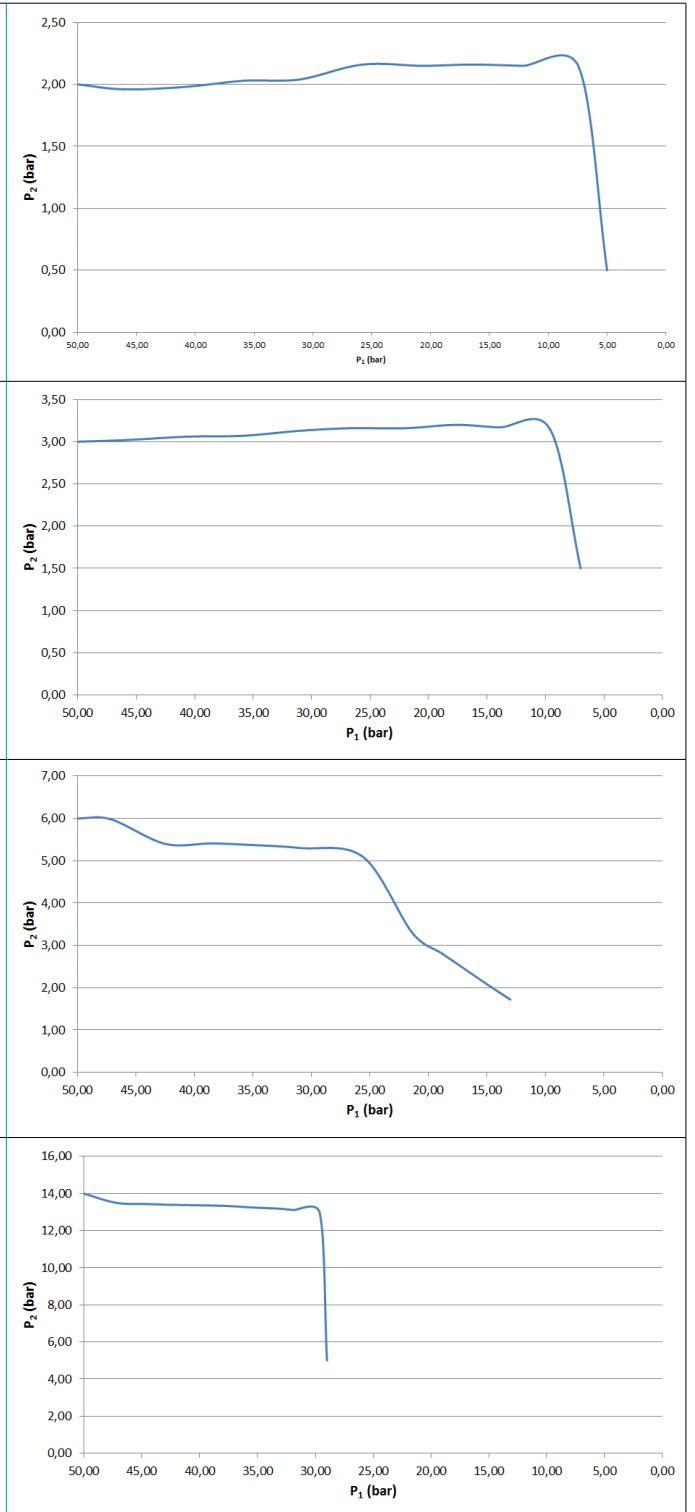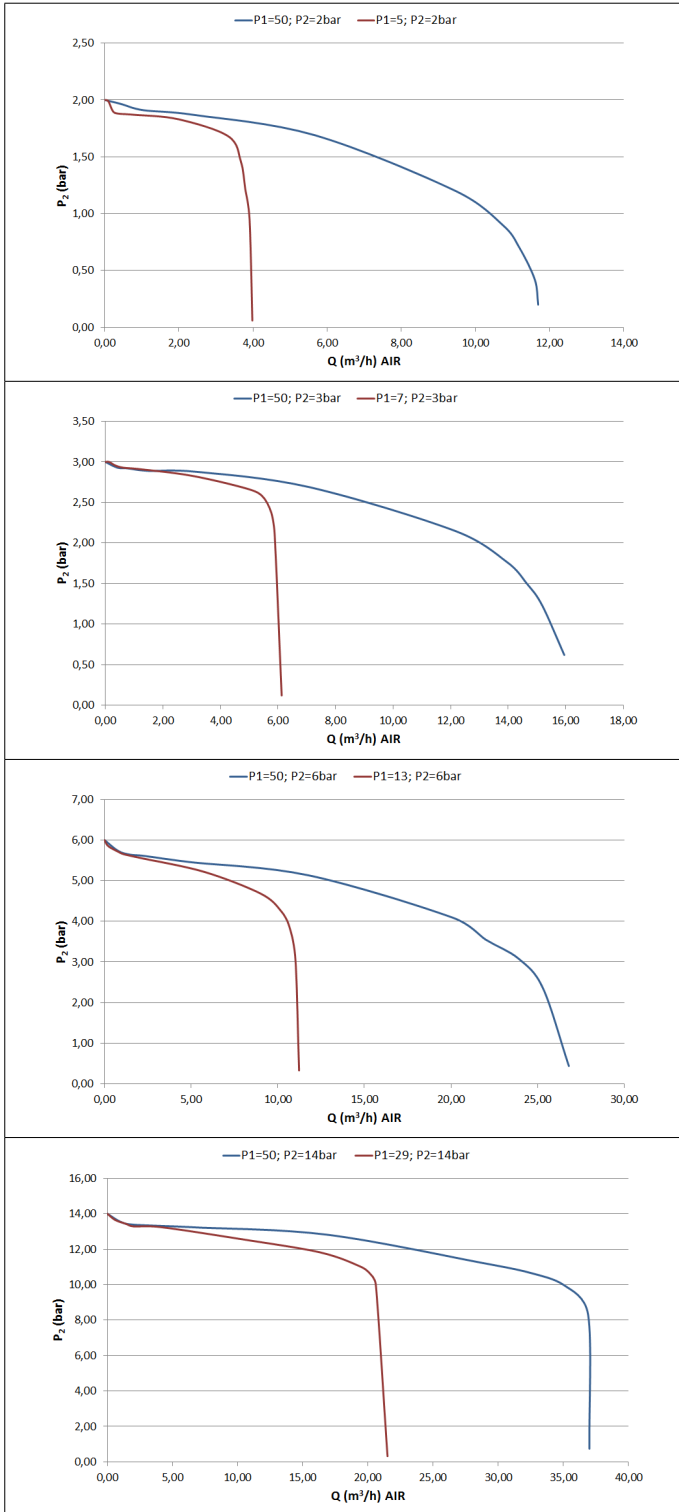

TECHNICAL DRAWING:

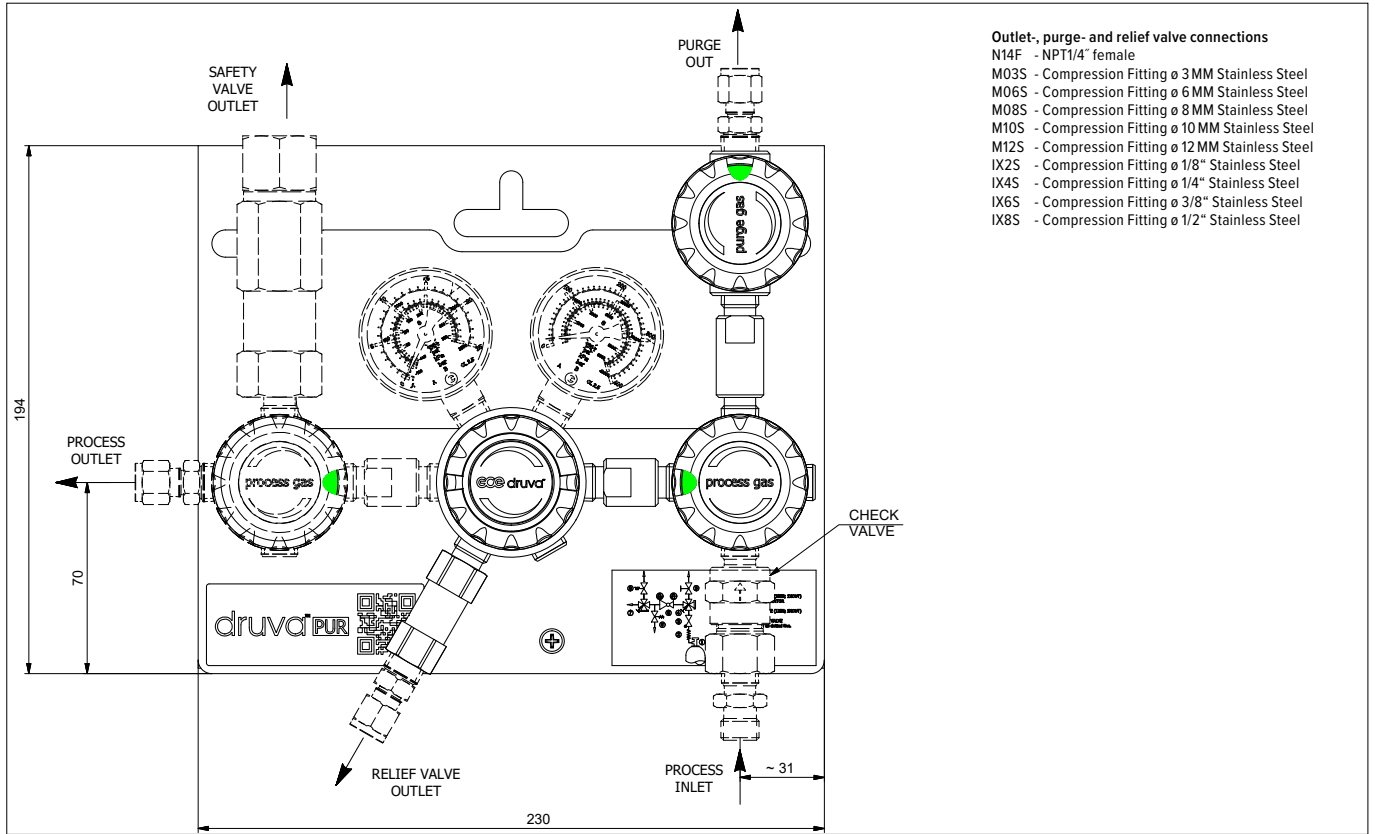

TECHNICAL DRAWING – VARIANTS:

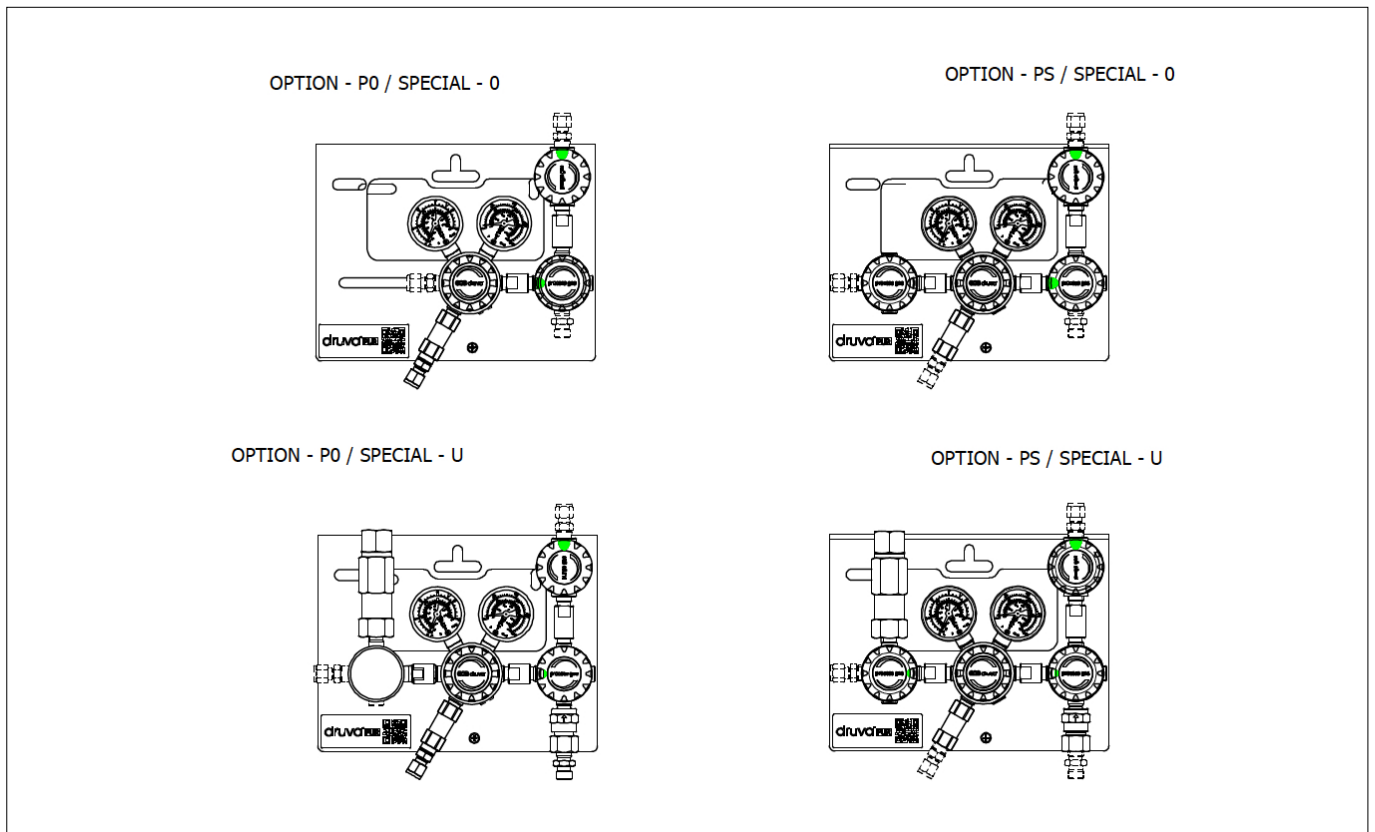

ORDER CODE:

Example Manifold | PUR Linie | Stainless Steel | Low Flow | Single Stage | Process Gas Purging

MSLH0X MSLHEX	S	P0	C	FX	F2	BT	BT	N14F	N14F (1/4" NPT female)	N14F (1/4" NPT female)
	Stages	Options	Specials	Inlet pressure (bar)	Outlet pressure (bar)	Inlet pressure gauge	Outlet pressure gauge	Process inlet connection	Process outlet connection	Purge & relief connection
	S Single stage	P0 HP purge valve	O without	F4 60	BX 3	BT Bourdon Tube gauge	BT Bourdon Tube gauge	N14F 1/4" NPT female	possible connections see technical drawing	possible connections see technical drawing
		PS HP purge valve LP Shut-off valve	C Check valve	FX 200*	CX 6	I1 Inductiv contact gauge I1	I2 Inductiv contact gauge I2 **	M14M Metric 14x1.5 male		
			S Safety valve	GX 300	D2 10	R5 Reed contact gauge R5	R2 Reed contact gauge R2 **			
			U Check valve + safety valve		DX 14		I1 Inductiv contact gauge I1			
					EY 28					
					EX 50					
					F2 100					
					FX 200*					

\* Inlet and outlet pressure 200 bar not available with pressure relief valve (PRV)

\*\* Only for outlet pressure 200 bar

Order code (as described above) without special characters or spaces! Complete Order Code [MSLH0XSP0CFXF2BTBTN14FN14FN14F](#)

